


THREE PIECES TRUNNION BALL VALVES – CLASS 150#

Size range: 2" to 42"

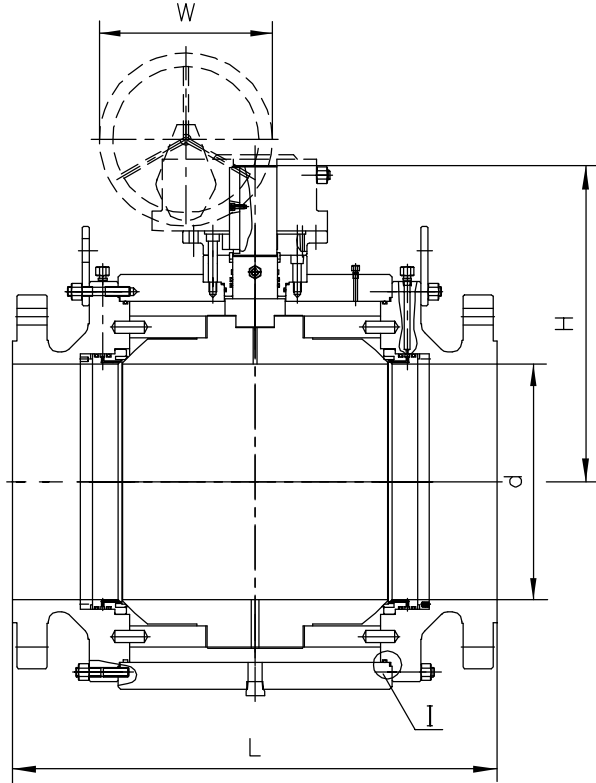

STANDARDS:	
Design	API 6D & BS5351
Test	API 598
Face to Face Dimensions	ANSI B16.10
End Flange Dimensions	ANSI B16.5(2" ~24") ANSI B16.47(26" ~42")
Butt-Weld Ends	ANSI B16.25

Class 150# Fig No.33150T
DIMENSIONS AND WEIGHTS

Size inch	d	A (RF)	H	W	Weight (Kg)
2"	51	178	165	400	29
3"	76	203	195	750	45
4"	102	229	230	1000	56
6"	152	394	330	1500	139
8"	203	457	395	400	245
10"	254	533	495	400	350
12"	305	610	580	400	620
14"	337	686	625	600	850
16"	387	762	670	600	1500
18"	438	864	700	750	1650
20"	489	914	840	750	2000
24"	591	1067	1050	750	2650
26"	635	1143	1150	750	2950
28"	686	1245	1210	900	3120
30"	737	1296	1300	900	3700
32"	781	1372	1375	900	4300
34"	832	1473	1425	900	5044
36"	876	1524	1500	900	5980
40"	978	1728	1600	900	6775
42"	1022	1930	1700	900	7440

Other Sizes: On request
RF: Flanged BW: Butt Weld
2" ~6" LEVER OPERATED

AVAILABLE OPTIONS:

STRUCTURE	End, Connection:	Flange Raised Face, Butt Weld, RTJ...
	Seat Rings:	Renewable
	Operation:	Lever, Gear, Electric, Pneumatic, Hydraulic...
MATERIALS	Body:	WCB, WC1, WC6, WC9, LCB, LCC, LC3, C5, C12, CF8, CF8M, CF3, CF3M, CF8C...
	Trims:	13%Cr, 304, 304L, 316, 316L, 321, 347, F-51, Monel...