
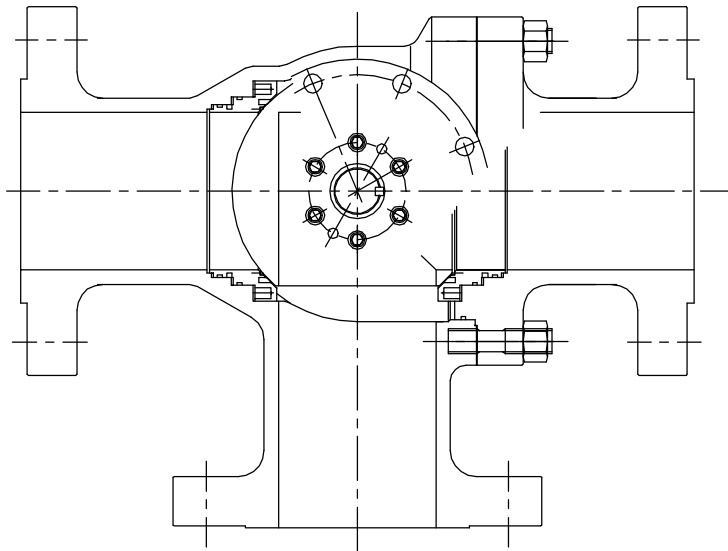


THREE-WAY BALL VALVES

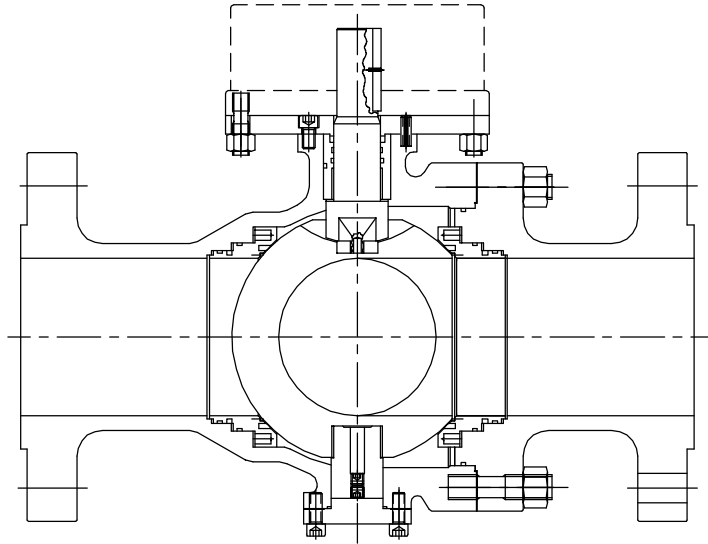

Three-Way Valves

The three-way ball valves needs to be defined in relation to the three coordinates axes.

Two openings can be located on a plane and the third perpendicular to it or also the three openings on one plane.

In each case, the openings and their direction of flow must be clearly defined on the purchase order.

These valves can be mounted with different types of seats and operators, depending on the service conditions, and

The special requirements of each installations.