


## GLOBE VALVES—Class 1500#, 2500#

Size range: 2" to 18"

Size range: 2" to 16"

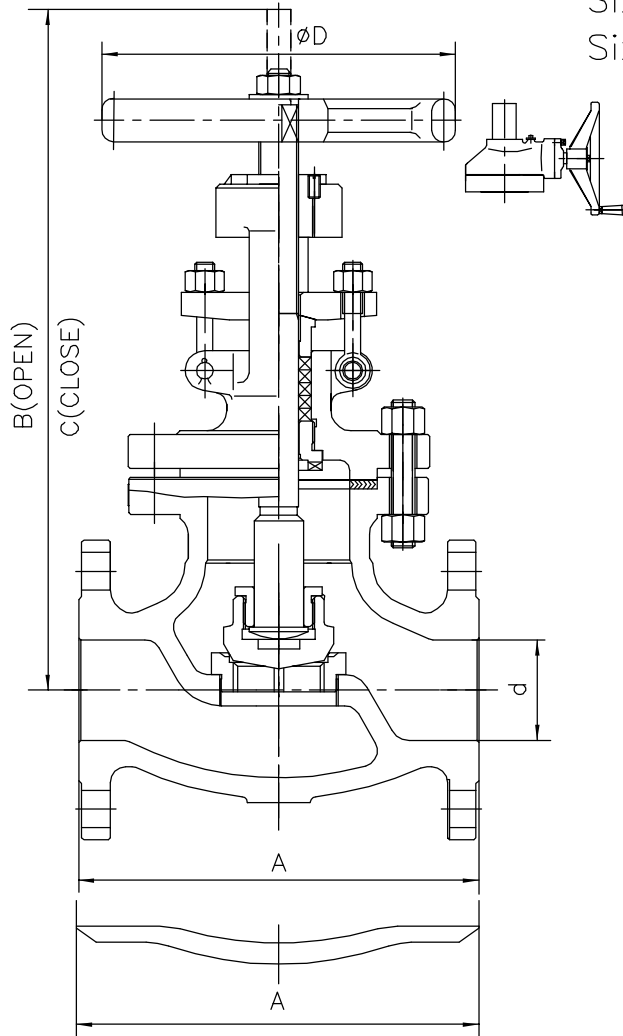

Class 1500#    Fig NO. 289(RF/RTJ)  
289 1/2 (BW)

**DIMENSIONS AND WEIGHTS**

Size inch	d	A RF & BW	B (OPEN)	C (CLOSE)	D	Weight(kg) RF & BW	
2"	47	368	531	551	355	112	84
3"	70	470	675	682	560	228	183
4"	92	546	763	670	560	336	277
6"	136	705	990	1165	800	822	715
8"	178	832	1655	1545	1000	856	750
10"	222	991	1705	1585	1200	1215	1000
12"	263	1130	1950	1800	1200	2268	2050

Class 2500#    Fig NO. 277(RF/RTJ)  
277 1/2 (BW)

**DIMENSIONS AND WEIGHTS**

Size inch	d	A RF & BW	B (OPEN)	C (CLOSE)	D	Weight(kg) RF & BW	
2"	38	451	543	510	355	140	115
3"	57	578	685	645	560	265	212
4"	73	673	817	765	700	438	386
6"	111	914	996	930	800	900	798
8"	146	1022	*	*	*	1430	1212
10"	184	1270	*	*	*	2500	2148
12"	219	1422	*	*	*	3700	3308

Other Sizes: On request

RF: Flanged    BW: Butt Weld

\* Use of gear actuator is recommended

**STANDARDS:**

Design	ANSI B16.34 & BS 1873
Test	API 598
Face to Face Dimensions	ANSI B16.10
End Flange Dimensions	ANSI B16.5
Butt-Weld Ends	ANSI B16.25

**AVAILABLE OPTIONS:**

STRUCTURE	End, Connection:	Flange Raised Face, Butt Weld, RTJ...
	Seat Rings:	Threaded (Renewable), Welded
	Operation:	Handwheel, Gear, Electric, Pneumatic, Hydraulic...
* MATERIALS	Body:	WCB, WC1, WC6, WC9, LCB, LCC, LC3, C5, C12, CF8, CF8M, CF3, CF3M, CF8C...
	Trims:	13%Cr, 304, 304L, 316, 316L, 321, 347, F-51, Monel...

\* Please refer to page of "Build Material"