


CAST IRON GLOBE VALVES—PN16

Size range: DN15 to DN 200

STANDARDS:	
Design	DIN 3356
Test	DIN 3230
Face to Face Dimensions	DIN 3202 F1
End Flange Dimensions	DIN 2533

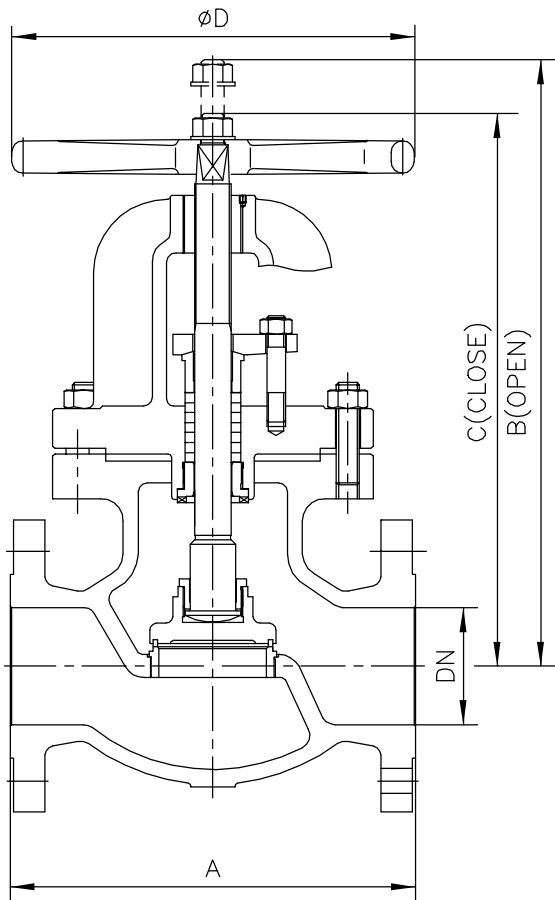

PN16 Fig No.51216
DIMENSIONS AND WEIGHTS

Size DN	A (RF)	B (OPEN)	C (CLOSE)	D	Weight (Kg)
15	130	188	182	65	7.5
20	150	195	185	65	9
25	160	211	201	80	12
32	180	268	253	120	14
40	200	274	254	120	15.2
50	230	302	277	160	16
65	290	338	306	200	17
80	310	382	342	250	32
100	350	428	378	250	50
125	400	505	443	300	55
150	480	570	497	360	62
200	600	680	583	400	92

Other Sizes:On request RF:Flanged

AVAILABLE OPTIONS:

STRUCTURE	End,Connection: Flange Raised Face...
	Seat Rings: Threaded(Renewable)
	Operation: Handwheel,Gear,Electric,Pneumatic,Hydraulic...
MATERIALS	Body: Gray Cast Iron, Ductile Iron...
	Trims: Stainless Steel, Brass, Bronze...