


## RISING STEM WEDGE GATE VALVES—PN10,PN16

Size range: DN40 to DN250

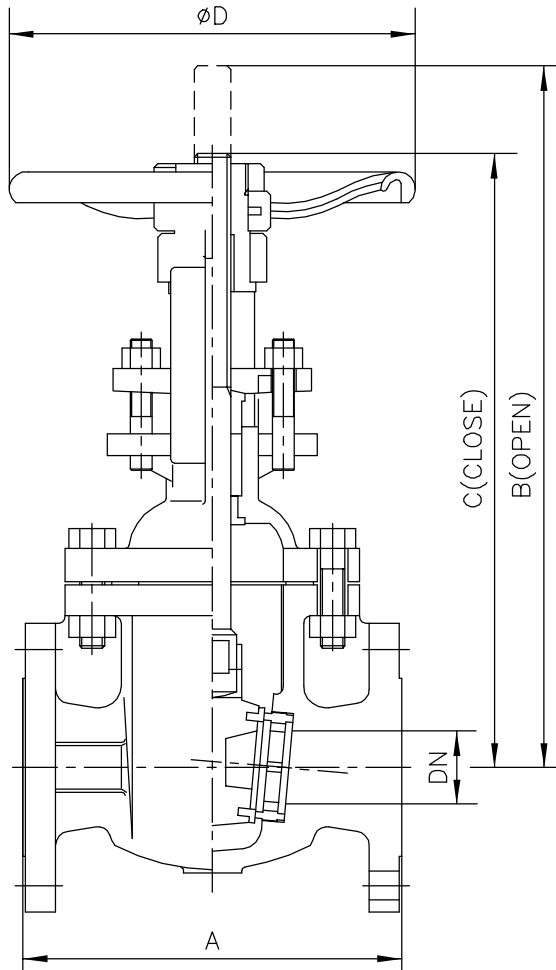

### STANDARDS:

Design	DIN 3352
Test	DIN 3230
Face to Face Dimensions	PN10—DIN3202 F4 PN16—DIN3205 F5
End Flange Dimensions	PN10—DIN2532 PN16—DIN2533

DIN-3202 F4 PN10 Fig No.51010

### DIMENSIONS AND WEIGHTS

Size DN	A (RF)	B (OPEN)	C (CLOSE)	D	Weight (kg)
40	140	330	284	160	12
50	150	364	309	160	13.5
65	170	412	341	160	16
80	180	482	396	180	24
100	190	563	458	200	40
125	200	660	530	250	55
150	210	752	595	250	68
200	230	970	762	300	108
250	250	1161	903	360	168

DIN 3202 F5 PN16 Fig No.51016

### DIMENSIONS AND WEIGHTS

Size DN	A (RF)	B (OPEN)	C (CLOSE)	D	Weight (kg)
40	240	330	284	160	13.5
50	250	365	310	180	15
65	270	468	397	180	18
80	280	492	406	200	27
100	300	572	467	250	43
125	325	678	548	280	58
150	350	791	634	300	72
200	400	995	787	360	112
250	450	1193	935	400	187

Other Sizes:On request

RF:Flanged

### AVAILABLE OPTIONS:

STRUCTURE	End,Connection: Flange Raised Face...
	Seat Rings: Threaded(Renewable)
	Operation: Handwheel,Gear,Electric,Pneumatic,Hydraulic...
MATERIALS	Body: Gray Cast Iron, Ductile Iron...
	Trims: Brass, Cast Manganese Bronze, Stainless Steel...