


## GLOBE VALVES—CLASS 1500~ 2500#

Size range: 2" to 14"

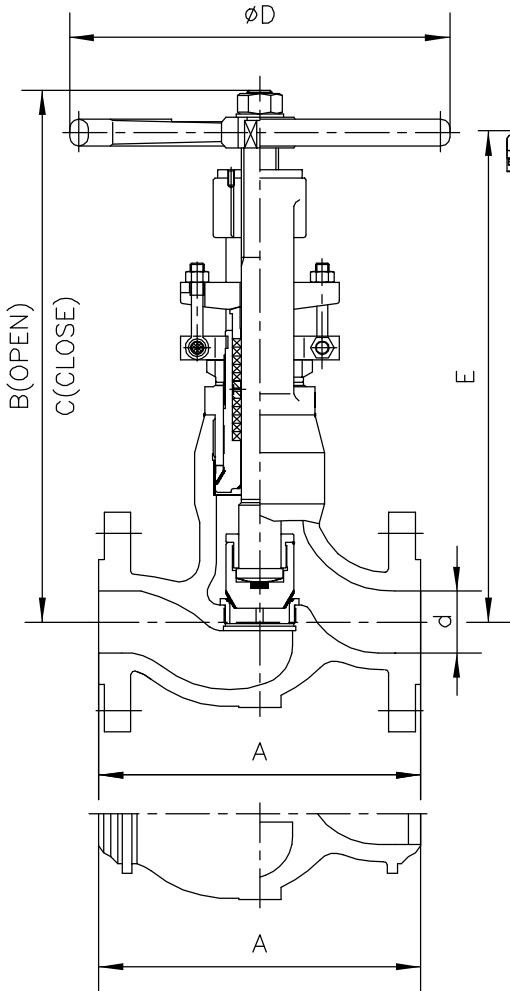

Class 1500# FIG 61500 PS  
DIMENSIONS AND WEIGHTS

Size inch	d	A (RF/BW)	B (OPEN)	C (CLOSE)	D	E	Weight (Kg)(BW)
2"	47	368	493	458	350		30
3"	70	470	580	540	450		70
4"	92	546	672	630	600		155
6"	136	705	930	870		915	340
8"	178	832	1355	1260		1305	710
10"	222	991	1625	1505		1550	1165
12"	263	1130	1840	1700		1775	1725
14"	289	1257	2100	1940		2035	2400

Class 2500# FIG 62500 PS  
DIMENSIONS AND WEIGHTS

Size inch	d	A (RF/BW)	B (OPEN)	C (CLOSE)	D	E	Weight (Kg)(BW)
2"	38	451	500	485	450		45
3"	57	578	680	662	500		95
4"	73	673	755	716	650		180
6"	111	914	1040	980		1025	450
8"	146	1022	1240	1158		1204	830
10"	184	1270	1520	1420		1495	1450
12"	219	1422	1780	1675		1750	2200

STANDARDS:	
Design	ANSI B16.34&BS 1873
Test	API 598
Face to Face Dimensions	ANSI B16.10
End Flange Dimensions	ANSI B16.5
Butt-Weld Ends	ANSI B16.25

Other Sizes: On request

BW: Butt Weld

Sizes 6" and larger the use of gear actuator is recommended

AVAILABLE OPTIONS:

STRUCTURE	End, Connection:	Flange Raised Face, Butt Weld, RTJ...
	Seat Rings:	Threaded (Renewable), Welded
	Operation:	Handwheel, Gear, Electric, Pneumatic, Hydraulic...
MATERIALS	Body:	WCB, WC1, WC6, WC9, LCB, LCC, LC3, C5, C12, CF8, CF8M, CF3, CF3M, CF8C...
	Trims:	13%Cr, 304, 304L, 316, 316L, 321, 347, F-51, Monel...