


GLOBE VALVES—CLASS 600~900#

Size range: 2" to 18"

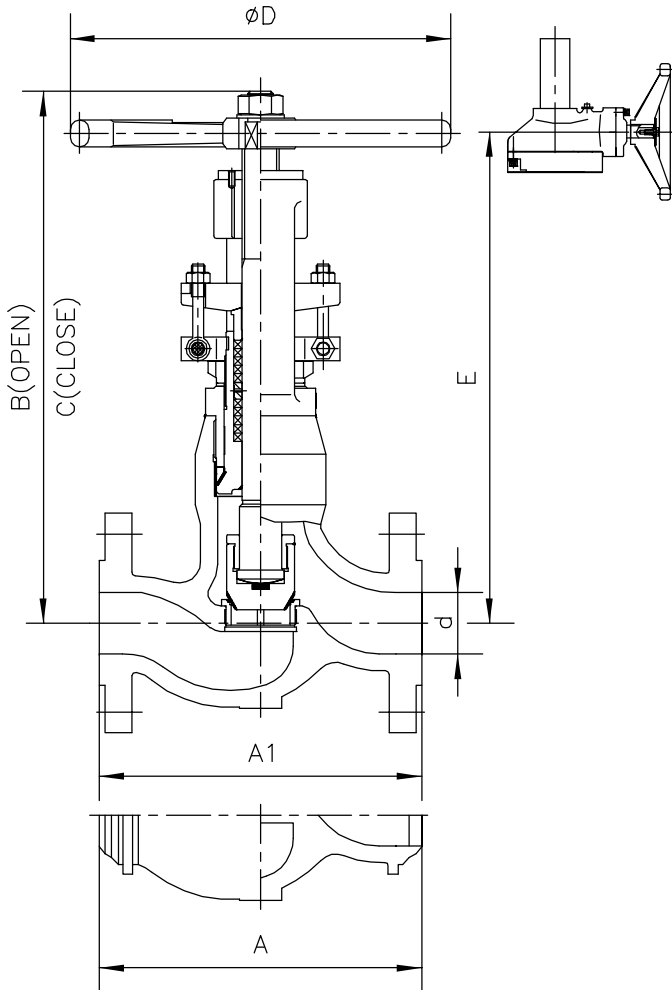

Class 600# FIG 6600 PS
DIMENSIONS AND WEIGHTS

Size inch	d	A1 (RF)	A (BW)	B (OPEN)	C (CLOSE)	D	E	Weight (Kg)(BW)
2"	51	292	178	405	373	250		17
3"	76	356	254	465	425	300		27
4"	102	432	305	573	523	450		42
6"	152	559	457	815	745	600		150
8"	200	660	584	1100	1012		1057	240
10"	248	787	711	1300	1190		1235	336
12"	298	838	813	1505	1375		1450	495
14"	327	889	889	1730	1580		1655	680
16"	375	991	991	1960	1790		1865	890
18"	419	1092	1092	2180	1990		2086	1150

Class 900# FIG 6900 PS
DIMENSIONS AND WEIGHTS

Size inch	d	A1 (RF)	A (BW)	B (OPEN)	C (CLOSE)	D	E	Weight (Kg)(BW)
2"	47	368	216	493	458	350		30
3"	73	381	305	518	540	500		55
4"	98	457	356	615	569	600		104
6"	146	610	508	950	875		910	325
8"	191	737	660	1307	1211		1256	580
10"	238	838	787	1510	1390		1435	900
12"	282	965	914	1740	1600		1675	1300
14"	311	1029	991	1950	1790		1865	1625
16"	356	1092	1092	2160	1980		2050	2300

STANDARDS:	
Design	ANSI B16.34&BS 1873
Test	API 598
Face to Face Dimensions	ANSI B16.10
End Flange Dimensions	ANSI B16.5
Butt-Weld Ends	ANSI B16.25

AVAILABLE OPTIONS:

STRUCTURE	End, Connection:	Flange Raised Face, Butt Weld, RTJ...
	Seat Rings:	Threaded (Renewable), Welded
	Operation:	Handwheel, Gear, Electric, Pneumatic, Hydraulic...
MATERIALS	Body:	WCB, WC1, WC6, WC9, LCB, LCC, LC3, C5, C12, CF8, CF8M, CF3, CF3M, CF8C...
	Trims:	13%Cr, 304, 304L, 316, 316L, 321, 347, F-51, Monel...

Other Sizes: On request

BW: Butt Weld

Class 600lb Sizes 8" and larger the use of gear actuator is recommended

Class 900lb Sizes 6" and larger the use of gear actuator is recommended