




FLUVAL

PRESSURE SEAL BONNET VALVES

Y-TYPE GLOBE VALVES—CLASS 1500~2500#

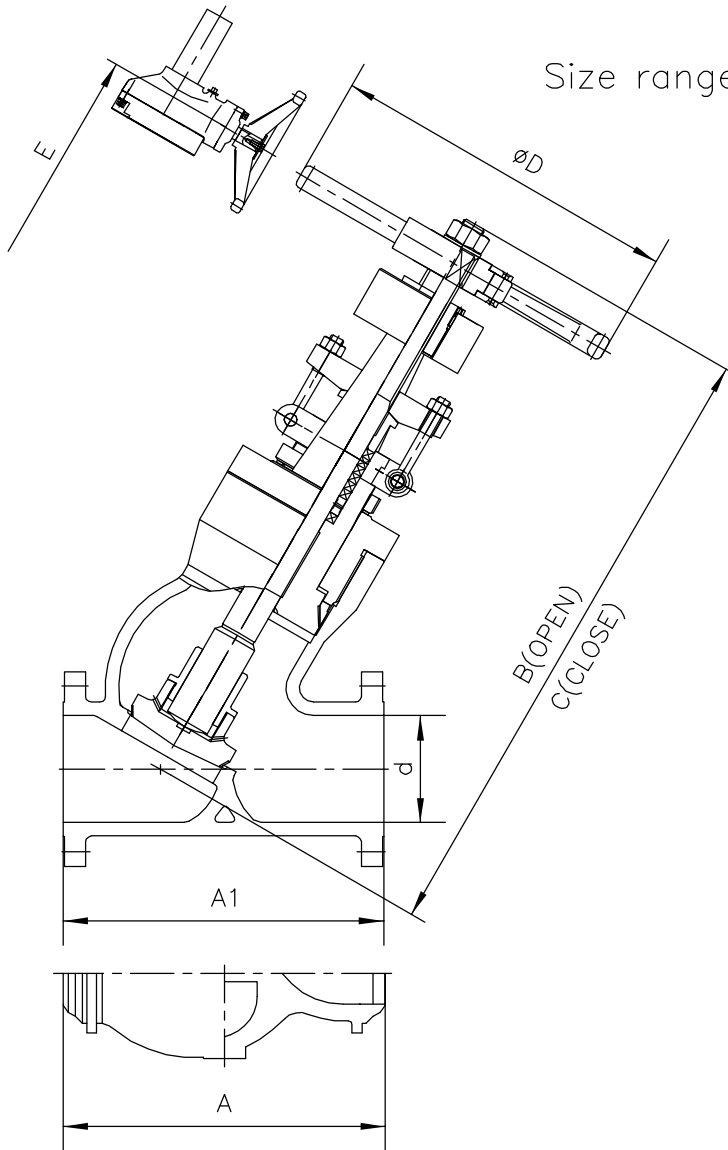

Size range: 2" to 14"

Class 1500# FIG 61500 PSY
DIMENSIONS AND WEIGHTS

Size inch	d	A (RF/BW)	B (OPEN)	C (CLOSE)	D	E	Weight (Kg)(BW)
2"	47	368	593	558	350		35
3"	70	470	680	640	450		85
4"	92	546	775	735	600		170
6"	136	705	1040	980		1025	360
8"	178	832	1475	1380		1420	760
10"	222	991	1750	1630		1670	1200
12"	263	1130	1970	1830		1890	1830
14"	289	1257	2230	2070		2150	2500

Class 2500# FIG 62500 PSY
DIMENSIONS AND WEIGHTS

Size inch	d	A (RF/BW)	B (OPEN)	C (CLOSE)	D	E	Weight (Kg)(BW)
2"	38	451	600	585	450		55
3"	57	578	680	662	500		110
4"	73	673	855	816	650		200
6"	111	914	1140	1080		1125	500
8"	146	1022	1340	1258		1305	950
10"	184	1270	1620	1520		1595	1600
12"	219	1422	1880	1775		1850	2350

Other Sizes: On request

BW: Butt Weld

Sizes 6" and larger the use of gear actuator is recommended

STANDARDS:	
Design	ANSI B16.34&BS 1873
Test	API 598
Face to Face Dimensions	ANSI B16.10
End Flange Dimensions	ANSI B16.5
Butt-Weld Ends	ANSI B16.25

AVAILABLE OPTIONS:

STRUCTURE	End, Connection:	Flange Raised Face, Butt Weld, RTJ...
	Seat Rings:	Threaded (Renewable), Welded
	Operation:	Handwheel, Gear, Electric, Pneumatic, Hydraulic...
MATERIALS	Body:	WCB, WC1, WC6, WC9, LCB, LCC, LC3, C5, C12, CF8, CF8M, CF3, CF3M, CF8C...
	Trims:	13%Cr, 304, 304L, 316, 316L, 321, 347, F-51, Monel...