




FLUVAL

PRESSURE SEAL BONNET VALVES

Y-TYPE GLOBE VALVES—CLASS 600~900#

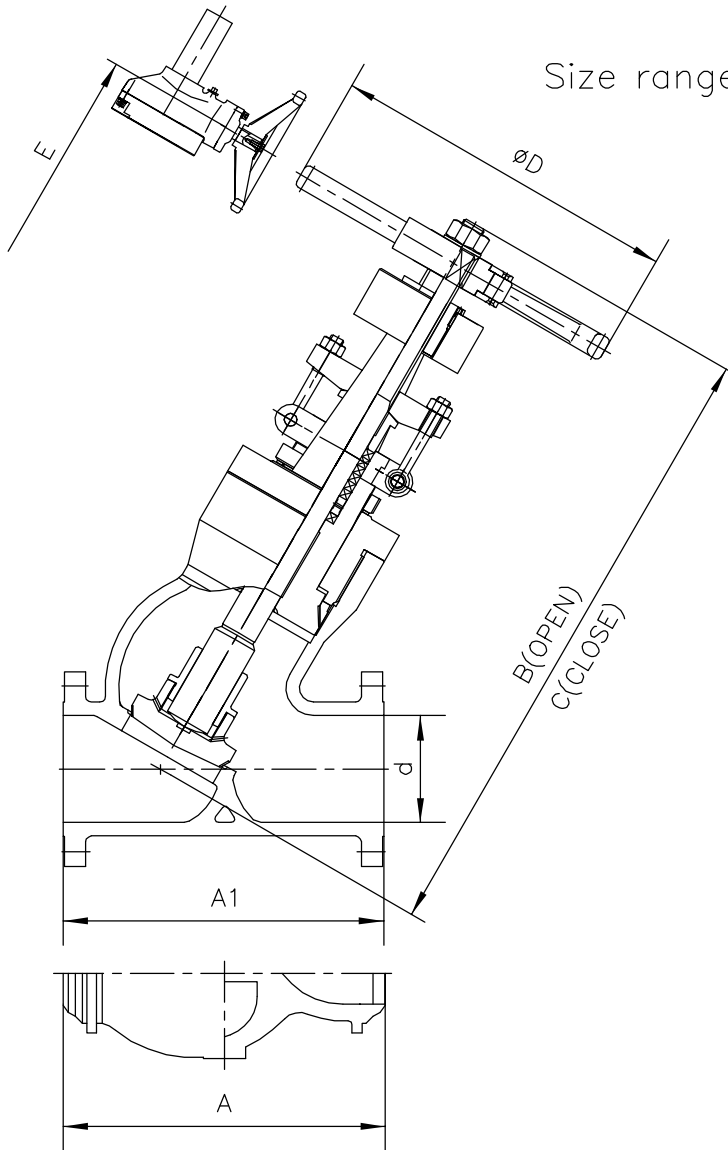

Size range: 2" to 18"

Class 600# FIG 6600 PSY
DIMENSIONS AND WEIGHTS

Size inch	d	A1 (RF)	A (BW)	B (OPEN)	C (CLOSE)	D	E	Weight (Kg)(BW)
2"	51	292	178	525	493	250		22
3"	76	356	254	585	545	300		32
4"	102	432	305	715	625	450		48
6"	152	559	457	965	895	600		160
8"	200	660	584	1255	1185		1210	265
10"	248	787	711	1460	1350		1385	360
12"	298	838	813	1665	1535		1600	520
14"	327	889	889	1890	1740		1805	750
16"	375	991	991	2100	1920		2015	960
18"	419	1092	1092	2310	2120		2236	1200

Class 900# FIG 6900 PSY
DIMENSIONS AND WEIGHTS

Size inch	d	A1 (RF)	A (BW)	B (OPEN)	C (CLOSE)	D	E	Weight (Kg)(BW)
2"	47	368	216	593	558	350		35
3"	73	381	305	618	640	500		60
4"	98	457	356	715	669	600		110
6"	146	610	508	1050	975		1010	340
8"	191	737	660	1407	1311		1356	620
10"	238	838	787	1610	1490		1535	1000
12"	282	965	914	1840	1700		1775	1400
14"	311	1029	991	2050	1890		1965	1750
16"	356	1092	1092	2260	2080		2150	2500

STANDARDS:	
Design	ANSI B16.34&BS 1873
Test	API 598
Face to Face Dimensions	ANSI B16.10
End Flange Dimensions	ANSI B16.5
Butt-Weld Ends	ANSI B16.25

Other Sizes: On request
 BW: Butt Weld
 Class 600lb Sizes 8" and larger the use of gear actuator is recommended
 Class 900lb Sizes 6" and larger the use of gear actuator is recommended

AVAILABLE OPTIONS:

STRUCTURE	End, Connection:	Flange Raised Face, Butt Weld, RTJ...
	Seat Rings:	Threaded (Renewable), Welded
	Operation:	Handwheel, Gear, Electric, Pneumatic, Hydraulic...
MATERIALS	Body:	WCB, WC1, WC6, WC9, LCB, LCC, LC3, C5, C12, CF8, CF8M, CF3, CF3M, CF8C...
	Trims:	13%Cr, 304, 304L, 316, 316L, 321, 347, F-51, Monel...